

Standard Implant Engine

COMPACT

ECONOMIC

DURABLE

- 9 programmable memories
- Automatic overload protection function
- Real time torque & RPM display
- Motor auto-calibration function
- Multifunctional foot control pedal



ORDER CODE

- | | | |
|-------------------|--------------|---------------------|
| · SET | X-CUBE | |
| · CONTROL BOX | X-CUBE | · MOTOR FORTE100aEI |
| · FOOT CONTROLLER | X-CUBE PEDAL | · ANGLE ACL(B)-61I |

Micro Motor & Handpiece



FORTE100aEI


- Dimension : 119.3 × ϕ 27 mm
- Weight : 314 g
- Max. RPM : 50,000



ACL(B)-61I

- Gear Ratio : 20 :1
- Max. RPM : 2,500
- Max. Torque : 55 N-cm
- Min. RPM : 30
- Weight : 48 g

Shorter and lighter

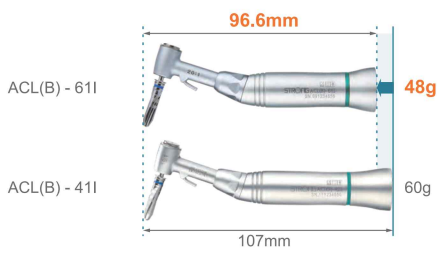

Motor Sleeve



CONTROL BOX

- Input : AC 100-120 V, 220-240 V (50/60Hz)
- Output : 48 VA
- Fuse : 5 A / 2 A
- Maximum Pumps : Max. 75ml / min
- Dimension : W 210 × D 260 × H 141 mm
- Weight : 2.95 kg

